

PAGOMat 3

Simple use with high user convenience and quality

Ideal price and performance

With the Pagomat 3, PAGO has extended its range of automatic labelling machines to include a model designed to handle simple requirements in the speed range up to 30m/min. The dispensing unit is based on the proven Pagomat technology and offers a unique cost/benefit ratio with its integrated control system.

Compact design for versatile use

The control with the operating unit is integrated directly into the Pagomat 3 dispenser. This eliminates the need for extra space for an external control. In this compact design, the Pagomat 3 can easily be integrated into any packaging line. The swivelling dispensing plate adjusts constantly to irregularities in the product shape during labelling and ensures uniform labelling accuracy. The Pagomat 3 is suitable for labelling all kinds of products.

Simple operation - intelligent functions

The user is guided by a two-line illuminated LCD display in the language of his choice. The memory for product-specific labelling data permits simple and fast conversion to other products. Through constant monitoring of the labelling procedure, the user is immediately alerted via a clear text display on the control unit to the label tape end, tear of the backing tape and other machine states.




Technical data PAGOmat 3

Passage width	100 mm and 170 mm
Label format (WxL)	10-100 mm x 10-999 mm and 10-170 mm x 10-999 mm
Label rolls	outside diameter: max. 300 mm; core diameter: 76 mm, 42 mm possible
Version	right or left-hand model for installation in any desired position
Design	based on a 20 mm thick aluminium base plate for stability and precise labelling results
Label roll unwinder	with tension relief and jockey roller brake for smooth unwinding ; transparent reel cover for simple check on label stock ; simple reel cover removal
Gap sensor	fixed mounting, easily adjustable
Dispensing beak	has simple adjustment for labelling to product shape
Dispensing speed	1 – 30 m/min, easily adjustable control in 0.1 m/s stages
Dispensing accuracy	at dispensing edge ± 0.2 mm
Drive	three phase step motor with fine resolution for silent running
Backing liner rewind	with rocker arm tension relief for impact-free winding as the roll diameter increases
Control	microprocessor control with product store and operating unit with clear text display
Memory	for 9 products with rapid conversion to products already set up
Operating control	4 x 90° rotatable for adjustment to the current installation position of the Pagomat 3; User-guided via illuminated LCD display, 2 lines of 16 characters each; Choice of user language (D, F, GB, I, E, NL, PL, HR); Simple operation with touch keys and electronic selection ; Direct keys for fast adjustment of dispensing speed and label position on the product during production; Basic setting and storage of products with password protection
Monitoring	with clear text display on the control unit: – Backing liner or break – Presser roller open/closed for constant labelling accuracy – Status of stepping motor drive missing labels on the web : – to prevent double labelling – automatic feed to ensure that each product is labelled
Interfaces	SPC compatible input/output signals 24 VDC

Subject to technical change without notice.



Swivelling dispensing plate for optimum adjustment to product.

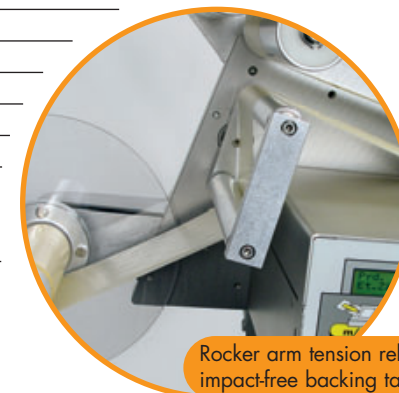

Rocker arm tension relief for impact-free backing tape winding.



Compact control with product memory and clear text user guidance.